



अंतर्राष्ट्रीय ऑटोमोटिव प्रौद्योगिकी केन्द्र
INTERNATIONAL CENTRE FOR AUTOMOTIVE TECHNOLOGY
[A Division of NATRiP Implementation Society (NATIS), Govt. of India]

TAC/Reference No. **C R 7 6 1 8**

Date : 13.05.2024





Cert	Dwg	Total
1	1	02 pgs

TYPE APPROVAL CERTIFICATE

(For compliance to AIS - 037)


Non- Transferable

1	Name of the Customer	M/s. Okaya Power Pvt. Limited				
2	Address of the Customer	D8, Udyog Nagar, Rohtak Road, New Delhi-110041, India				
3	Manufacturer Name & Plant Address	M/s. Sunoxx International Pvt. Ltd. Palli Road, Tehsil, Nalagarh, Panjehra, Solan, Himachal Pradesh, 174101, India				
4	Description of the Test Component	Battery Pack (Lead Acid)				
4.1	Battery Trade Mark	OKAYA				
4.2	Battery Model No.	OPERT14012				
4.3	Battery Nominal Voltage	12 V				
4.4	Battery Capacity	100Ah				
4.5	Drawing No.	DW-1573-0				
5	Pre-test Inspection Date	08.05.2024				
	Pre-test inspection report No.	CT0GT7617 Dated 09.05.2024				
6	Applicability on Vehicle Category	E-rickshaw / E-carts				
6.1	Applicable Notified Standard	AIS:048:2009 with amendment No.2 on 17.01.2020.				
6.2	Test Report No.	CT0GT7555 dated 27.02.2024				
7	Details of Quality Management System (QMS)	Sr.No.	Type of QMS	Certifying Agency	Certificate No.	Validity up to
		1	ISO 9001: 2015	QRO	305024030780Q	06.03.2027
8	Approval	√ Granted/ Not Granted / Extended				
9	The CoP period for the Component mentioned in Sr. No. 4 above shall begin from the date of commercial production & 1st CoP shall be completed before 31 st March 2026					

ICAT Reference	CCTNOKYATFEEL176522 dated 03-May-2024	Please turn over for DISCLAIMER	
AUTHORISED-SIGNATORY			
			
UDIT KAUL DY. MANAGER	SONU KR. SUDRANIA MANAGER	SAURABH DALELA DIRECTOR	Page 1 of 1

MARK	REV.NO.	DESCRIPTION	REVISED BY	DATE
△	-	-	-	-


OVER ALL LENGTH = 408±3.0

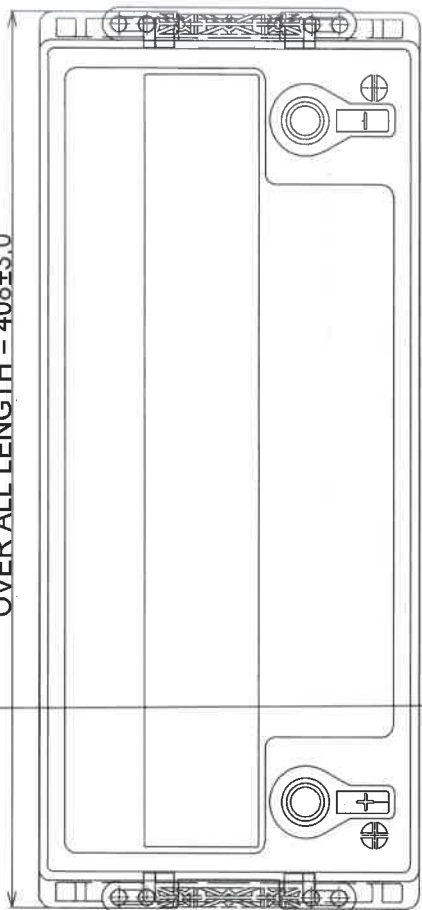

NOTE:-
 CONTAINER MATERIAL : POLYPROPYLENE
 1. TYPE OF BATTERY : LEAD ACID BATTERY -TUBULAR
 2. NOMINAL VOLTAGE :12
 3. CAPACITY (Ah) : 100Ah@C5 CORRECTED AT 30°C
 4. TERMINAL POLARITY :RIGHT
 5. SUITABLE APPLICATION : ELECTRIC VEHICLE



OVER ALL WIDTH = 174±3.0

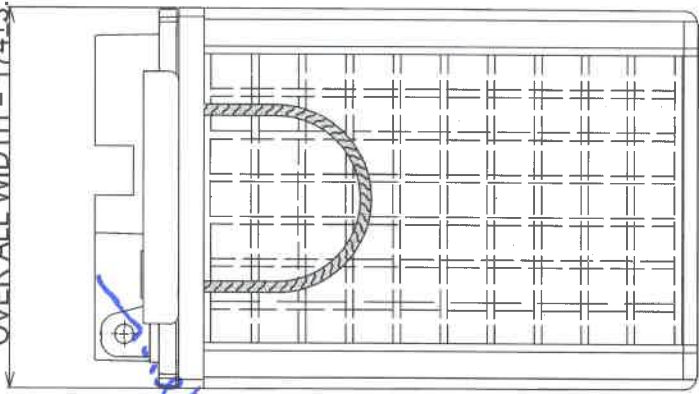

OVER ALL HEIGHT = 274±3.0



HEIGHT UPTO TERMINAL = 271±3.0

DESIGN	DRAWN	CHECKED	APPROVED	DATE	SCALE	PART. MATL./MATL.CODE	DESCRIPTION	WEIGHT
NARINDER	S-NDEEP	RAJESH	M.SHETTY	29-02-24	1:1	---	SEE NOTE	---
UNSPECIFIED	TOLERANCE	UNSPECIFIED	DRAFT ANGLE	15°-30°		SPECIFICATION .NO.	REVISION	
UNDER 4	±0.15	UNDER 4	UNSPECIFIED	RADIUS 0.2		SP.M.S. - 1832-0	00	
OVER 16	±0.2	OVER 16	UNDER 6.3	±0.3		PART NAME		
OVER 63	±0.3	OVER 63	UNDER 250	±0.5		FINISHED BATTERY FOR		
OVER 250	±0.8	OVER 250	ANGHT	DO NOT SCALE THE DRG.		OPERT 14012		

OKAYA POWER LTD
 D-7, UDYOG NAGAR, ROHTAK ROAD
 NEW DELHI

SHEET 01 OF 01
 DW-1573-0